



VIKING CUBE WALLS

MODULAR SYSTEM

The architectural design of these cubes consists of a modern style with natural wood beauty. The ability to choose large display windows gives you a fantastic panoramic view and natural light inside. In the design of these products, we combine traditional materials with state-of-the-art technology to provide comfortable and light-filled spaces. The exterior from spruce wood and the finished coating look beautiful in their natural environment. Inside a wide range of interiors is available - there may be everything you want. For one - a relaxing space or a home office; for others, there is a gym, studio, or games room. Each Viking cube is built by an experienced team and the purpose of the cube can be customized to suit your individual needs. All you have to do is decide what you want!



PRODUCT DESCRIPTION

CUBE WALL PANELS

The 1000 x 2200 mm walls are made of spruce wood. The light, golden-white spruce is ideal for cubes construction designs.

INSULATED FULL PANEL WALL

Standard set: panel size is 1000 x 2200 mm; wall frame 45 x 45 mm, insulation - 50 mm (stone wool), panel covered with inside 96 x 12 mm and outside 145 x 18 mm horizontal spruce cladding boards. The thickness of the finished outdoor wall segment is 75 mm. The thickness of the indoor wall is 70 mm.

STANDARD FULL PANEL WALL

Standard set: panel size is 1000 x 2200 mm; wall frame 45 x 45 mm; panel covered with inside 96 x 12 mm and outside 145 x 18 mm horizontal spruce cladding boards. The thickness of the finished outdoor wall segment is 75 mm. The thickness of the indoor wall is 70 mm.

FULL PANEL WALL WITH OPENING WINDOW

Standard set: panel size is 1000 x 2200 mm; wall frame 45 x 45 mm, panel covered with inside 96 x 12 mm and outside 145 x 18 mm horizontal spruce cladding boards. Size of window (glass package) - 880 x 510 mm. The thickness of the finished outdoor wall segment is 75 mm.

INSULATED FULL PANEL WALL WITH OPENING WINDOW

Standard set: panel size is 1000 x 2200 mm; wall frame 45 x 45 mm, insulation (stone wool) - 50 mm; panel covered with inside 96 x 12 mm and outside 145 x 18 mm horizontal spruce cladding boards. Size of window (glass package) - 880 x 510 mm. The thickness of the finished outdoor wall segment is 75 mm.

INSULATED FULL PANEL WALL WITH WINDOW (180 x 1200 mm)

Standard set: panel size is 1000 x 2200 mm; wall frame 45 x 45 mm, insulation (stone wool) - 50 mm; panel covered with inside 96 x 12 mm and outside 145 x 18 mm horizontal spruce cladding boards. Size of window (tempered glass) - 180 x 1200 mm. The thickness of the finished outdoor wall segment is 75 mm. The thickness of the indoor wall is 70 mm.

INSULATED FULL PANEL WALL WITH WINDOW (200 x 200 mm)

Standard set: panel size is 1000 x 2200 mm; wall frame 45 x 45 mm, insulation (stone wool) - 50 mm; panel covered with inside 96 x 12 mm and outside 145 x 18 mm horizontal spruce cladding boards. Size of window (tempered glass) - 200 x 200 mm. The thickness of the finished outdoor wall segment is 75 mm. The thickness of the indoor wall is 70 mm.

WOOD TEMPERED GLASS WALL

Standard set: panel size is 1000 x 2200 mm; wall frame 75 x 45 mm with full tempered glass window.

WOODEN GLASS WALL WITH GLASS PACKAGE

Standard set: panel size is 1000 x 2200 mm; wall frame 75 x 45 mm with a glass package of one chamber (2 glasses) window.

DECORATIVE SUNSCREEN WALL WITH TEMPERED GLASS

Standard set: wall panel dimensions are 1000 x 2200 mm; wall frame 75 x 45 mm; horizontal sunscreen wall consists of 18 x 50 mm boards with full tempered glass (8 mm) window.

DECORATIVE SUNSCREEN WALL WITH GLASS PACKAGE

Standard set: wall panel dimensions are 1000 x 2200 mm; wall frame 75 x 45 mm; horizontal sunscreen wall consists of 18 x 50 mm boards with glass package of one chamber (2 glasses).

DECORATIVE SUNSCREEN WALL (without glass)

Standard set: wall panel dimensions are 1000 x 2200 mm; wall frame 75 x 45 mm; horizontal sunscreen wall consists of 18 x 50 mm boards.

The Viking Cube doors come in spruce and aluminum material. Spruce doors with tempered glass windows; two models of aluminum doors with sliding system, which is very popular now.

WOODEN DOORS

WOODEN DOOR (990 X 2195 mm)

Standard set: 990 x 2195 mm wooden door (from spruce) without windows. Available with metal or wooden handles.

WOODEN DOOR (990 X 2195 mm) WITH TEMPERATED GLASS WINDOWS

Standard set: 990 x 2195 mm wooden door (from spruce) with large tempered glass windows and lock. Available with metal or wooden handles.

WOODEN DOOR (990 X 2195 mm) WITH GLASS PACKAGE WINDOWS

Standard set: 990 x 2195 mm wooden door (from spruce) with large glass package windows and lock. Available with metal or wooden handles.

ALUMINIUM WALLS, SLIDING DOOR

ALUTECH SYSTEM

GLASS WALL ALUTECH

The size of the Aluminum panel is 1000 x 2200 mm; Frame wide: 40 mm; Glazing: single glass; Tempered glass thickness: 4 mm.

2-RAILS SLIDING DOOR ALUTECH

The size of the sliding system is 2000 x 2200 mm. Standard set: 2 rails; System frame profile wide: 60 mm; Door profile depth of the frame and the sash: 45 mm; Tempered glass thickness: 4 mm; This is single-chamber aluminum system. Color: metallic/white.

3-RAILS SLIDING DOOR ALUTECH

The aluminum 3-rails sliding doors system size is 3000 x 2200 mm. Standard set: 3 rails; System frame profile wide: 90 mm; Door profile depth of the frame and the sash: 45 mm; Single tempered glass thickness: 4 mm; Color: metallic/white.

REYNAERS SYSTEM

GLASS WALL REYNAERS

Wall panel dimensions are 1000 x 2200 mm. The thickness of the glass packet is 26 mm; Thermal mold: 1.1 W/(m² K); System profile frame: 45 mm; Sliding doors in both directions; Color: metallic/white.

2-RAILS SLIDING DOOR REYNAERS

The size of the sliding system is 2000 x 2200 mm. The design depth is 50 mm for wings and 120 mm for frames double-ground ways and 184 mm for triple-ground ways frames. The thickness of the glass packet is 24 mm; Thermal mold: 1.1 W/(m² K); System profile frame: 45 mm; Color: metallic/white; Sliding doors in both directions.

2-RAILS SLIDING DOOR REYNAERS

Aluminum 2-rails sliding doors system (3000 x 2200 mm). Design depth are 50 mm for wings and 120 mm for frames double ground ways and 184 mm for triple ground ways frames; System profile frame: 45 mm; Color: metallic/white; Sliding doors in both directions.

3-RAILS SLIDING DOOR REYNAERS

The size of aluminum 3-rails sliding doors system Reynaers is 3000 x 2200 mm. Standard set: 3 rails; System frame profile wide: 90 mm; Door profile depth of the frame and the sash: 45 mm; Single glass thickness: 4 mm; Color: metallic/white This is a single-chamber aluminum system.



SPECIFICATION

Timber

Spruce

STANDARD SET

Full panel wall. STANDARD SET: Panel size 1000 x 2200 mm; Wall frame 45 x 45 mm; Panel covered with inside 96 x 12 mm and outside 145 x 18 mm horizontal spruce cladding boards. Thickness of the finished wall segment is 75 mm.

Full panel wall with window. STANDARD SET: Panel size 1000 x 2200 mm; Wall frame 45 x 45 mm; Panel covered with inside 96 x 12 mm, outside 145 x 18 mm horizontal spruce cladding boards; Insulation 50 mm rock wool (for insulated panels); Thickness is 75 mm

Sunscreen wall. STANDARD SET: Panel size 1000 x 2200 mm; Wall frame 75 x 45 mm; Horizontal sunscreen wall consists of 18 x 50 mm boards.

Wooden glass wall. STANDARD SET: Panel size 1000 x 2200 mm; Wall frame 75 x 45 mm; With full tempered glass window or with glass package of one chamber (2 glasses) window.

Aluminium glass wall Alutech. STANDARD SET: Panel size: 1000 x 2200 mm; Frame wide: 40 mm; Glazing: single glass; Glazing thickness: 4 mm.

Aluminium sliding doors system. STANDARD SET: 2 or 3 - rails, sliding doors system Alutech or Reynaers.

VIKING CUBE

ELEMENTS | WALLS

The 1000 x 2200 mm walls are made of spruce wood. The light, golden-white spruce are ideal for cubes construction designs.



1. INSULATED FULL PANEL WALL

Standard set: panel size is 1000 x 2200 mm; wall frame 45 x 45 mm, insulation (stone wool) - 50 mm; panel covered with inside 96 x 12 mm and outside 145 x 18 mm horizontal spruce cladding boards. The thickness of the finished outdoor wall segment is 75 mm. The thickness of the indoor wall is 70 mm.

2. STANDARD FULL PANEL WALL

Standard set: panel size is 1000 x 2200 mm; wall frame 45 x 45 mm; panel covered with inside 96 x 12 mm and outside 145 x 18 mm horizontal spruce cladding boards. The thickness of the finished outdoor wall segment is 75 mm. The thickness of the indoor wall is 70 mm.

3. FULL PANEL WALL WITH OPENING WINDOW

Standard set: panel size is 1000 x 2200 mm; wall frame 45 x 45 mm, panel covered with inside 96 x 12 mm and outside 145 x 18 mm horizontal spruce cladding boards. Size of window (glass package) - 880 x 510 mm. The thickness of the finished outdoor wall segment is 75 mm.

4. INSULATED FULL PANEL WALL WITH OPENING WINDOW

Standard set: panel size is 1000 x 2200 mm; wall frame 45 x 45 mm, insulation (stone wool) - 50 mm; panel covered with inside 96 x 12 mm and outside 145 x 18 mm horizontal spruce cladding boards. Size of window (glass package) - 880 x 510 mm. The thickness of the finished outdoor wall segment is 75 mm.

5. INSULATED FULL PANEL WALL WITH WINDOW (180 x 1200 mm)

Standard set: panel size is 1000 x 2200 mm; wall frame 45 x 45 mm, insulation (stone wool) - 50 mm; panel covered with inside 96 x 12 mm and outside 145 x 18 mm horizontal spruce cladding boards. Size of window (tempered glass) - 180 x 1200 mm. The thickness of the finished outdoor wall segment is 75 mm. The thickness of the indoor wall is 70 mm.

6. INSULATED FULL PANEL WALL WITH WINDOW (200 x 200 mm)

Standard set: panel size is 1000 x 2200 mm; wall frame 45 x 45 mm, insulation (stone wool) - 50 mm; panel covered with inside 96 x 12 mm and outside 145 x 18 mm horizontal spruce cladding boards. Size of window (tempered glass) - 200 x 200 mm. The thickness of the finished outdoor wall segment is 75 mm. The thickness of the indoor wall is 70 mm.

7. WOOD TEMPERED GLASS WALL

Standard set: panel size is 1000 x 2200 mm; wall frame 75 x 45 mm with full tempered glass window.

8. WOODEN GLASS WALL WITH GLASS PACKAGE

Standard set: panel size is 1000 x 2200 mm; wall frame 75 x 45 mm with glass package of one chamber (2 glasses) window.

9. DECORATIVE SUNSCREEN WALL WITH TEMPERED GLASS

Standard set: wall panel dimensions are 1000 x 2200 mm; wall frame 75 x 45 mm; horizontal sunscreen wall consists of 18 x 50 mm boards with full tempered glass (8 mm) window.

10. DECORATIVE SUNSCREEN WALL WITH GLASS PACKAGE

Standard set: wall panel dimensions are 1000 x 2200 mm; wall frame 75 x 45 mm; horizontal sunscreen wall consists of 18 x 50 mm boards with glass package of one chamber (2 glasses).

11. DECORATIVE SUNSCREEN WALL (without glass)

Standard set: wall panel dimensions are 1000 x 2200 mm; wall frame 75 x 45 mm; horizontal sunscreen wall consists of 18 x 50 mm boards.

” Various combinations of wall panels and optional equipment are offering individual solutions for use. ”

ELEMENTS | WOODEN DOORS



WOODEN DOOR (990 X 2195 mm)

Standard set: 990 x 2195 mm wooden door (from spruce) without windows. Available with metal or wooden handles.

WOODEN DOOR (990 X 2195 mm) WITH GLASS PACKAGE WINDOWS

Standard set: 990 x 2195 mm wooden door (from spruce) with large glass package windows and lock. Available with metal or wooden handles.

WOODEN DOOR (990 X 2195 mm) WITH TEMPERATED GLASS WINDOWS

Standard set: 990 x 2195 mm wooden door (from spruce) with large tempered glass windows and lock. Available with metal or wooden handles.

DRAWINGS

ELEMENTS | WALLS | DOORS

The Viking Cube doors come in spruce and aluminum material. Spruce doors with tempered glass windows; two models of **aluminum** doors with a sliding system, which is very popular now.

ALUTECH SYSTEM

GLASS WALL ALUTECH	2-RAILS SLIDING DOOR ALUTECH	3-RAILS SLIDING DOOR ALUTECH
		
The size of Aluminum panel is 1000 x 2200 mm: Frame wide: 40 mm; Glazing: single glass; Tempered glass thickness: 4 mm.	The size of the sliding system is 2000 x 2200 mm. Standard set: 2 rails; System frame profile wide: 60 mm; Door profile depth of the frame and the sash: 45 mm; Tempered glass thickness: 4 mm; This is single-chamber aluminum system. Color: metallic/white.	The aluminum 3-rails sliding doors system size is 3000 x 2200 mm. Standard set: 3 rails; System frame profile wide: 90 mm; Door profile depth of the frame and the sash: 45 mm; Single tempered glass thickness: 4 mm; Color: metallic/white. This is a single-chamber aluminum system.

REYNAERS SYSTEM

GLASS WALL REYNAERS	2-RAILS SLIDING DOOR REYNAERS	2-RAILS SLIDING DOOR REYNAERS
		
Wall panel dimensions are 1000 x 2200 mm. The thickness of the glass packet is 26 mm; Thermal mold: 1,1 W/(m² K); System profile frame: 45 mm; Sliding doors in both directions; Color: metallic/white.	The size of the sliding system is 2000 x 2200 mm. The design depth is 50 mm for wings and 120 mm for frames double-ground ways and 184 mm for triple ground ways frames. The thickness of the glass packet is 24 mm; Thermal mold: 1,1 W/(m² K); System profile frame: 45 mm; Color: metallic/white; Sliding doors in both directions.	Aluminum 2-rails sliding doors system (3000 x 2200 mm). Design depth are 50 mm for wings and 120 mm for frames double ground ways and 184 mm for triple ground ways frames; System profile frame: 45 mm; Color: metallic/white; Sliding doors in both directions.

3-RAILS SLIDING DOOR REYNAERS


	The size of aluminum 3-rails sliding doors system Reynaers is 3000 x 2200 mm. Standard set: 3 rails; System frame profile wide: 90 mm; Door profile depth of the frame and the sash: 45 mm; Single glass thickness: 4 mm; Color: metallic/white. This is a single-chamber aluminum system.
---	---

PAINTING


COLOR CARD

EXTERIOR WOOD STAIN COLORS

Water-based, quick drying premium total protection for wood outside.
Thin layer varnish – 3 in 1: impregnation, primer, and varnish!

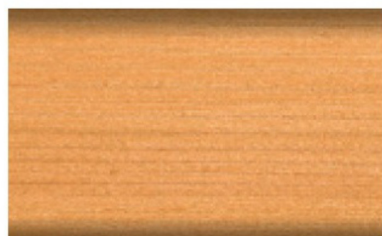


PINE / LARCH RC260

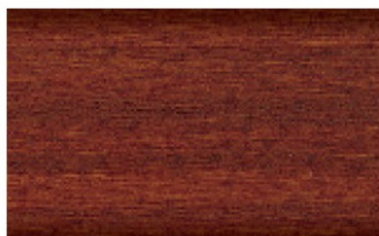


TEAK RC545




CHESTNUT RC555

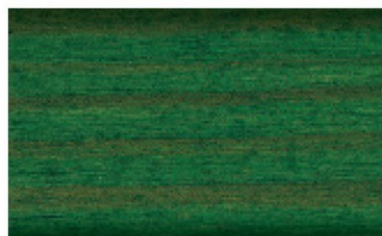

FIR GREEN RC960

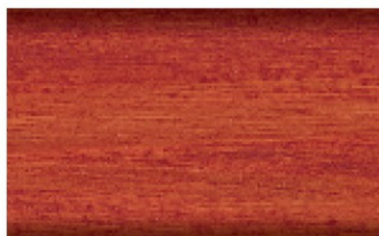


MAHAGONY RC565

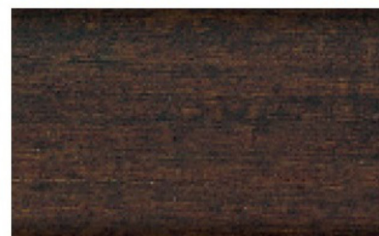

PALISANDER RC720




SILVER GREY RC970

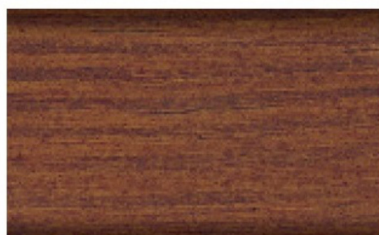

NUT WOOD RC660



PINE RC270

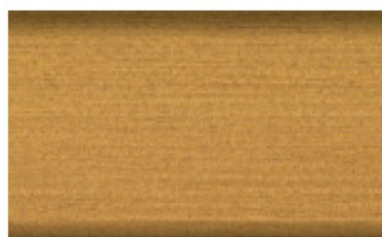

RUSTIC OAK RC360




LIGHT OAK RC365




HEMLOCK RC120



WHITE RC990

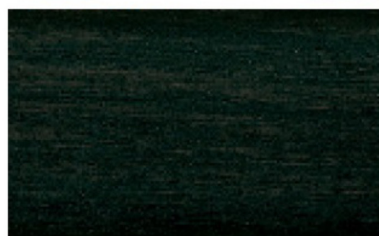

EBONY RC790

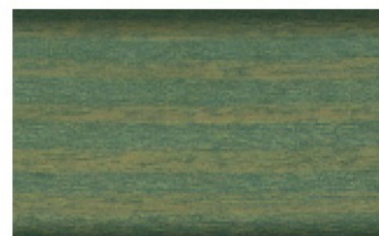

SALT GREEN RC965


PLEASE NOTE: The colors shown in the catalogue and website may not 100% match the color you will receive.
The color of the wood material affects the final color.

PAINTING

COLOR CARD

EXTERIOR WOOD PAINT COLORS


Weather protection, water-based paints. High-performance and environmentally friendly.



WHITE / RAL 9016




ANTRACITE GREY / RAL 7016



LIGHT GREY / RAL 7035



DUSTY GREY / RAL 7037



OXIDE RED / RAL 3009



JET BLACK / RAL 9005



MOSS GREEN / RAL 6005



AZURE BLUE / RAL 5009



GREY BROWN / RAL 8019



BROWN RED / RAL 3011

PLEASE NOTE: The colors shown in the catalogue and website may not 100% match the color you will receive. The color of the wood material affects the final color.

PAINTING

AUTOMATIC MACHINE SPRAY TECHNOLOGY

Benefits

One of the main and most obvious benefits of using a paint machine is the speed and flexibility at which we can suggest our painting service for all of our products. A spray paint machine can get the work done faster and more consistently than manually painting. While the machine works faster, it improves quality too – sprayers produce an even coat of paint, leaving a high-quality finish.

With our painting service from now, we can suggest our client's maximum flexibility! Not assembled products such as Grill cabins, Pavilions, Camping pods, and other products of any size you can order painted too!

PROFESSIONAL SPRAY

The high-quality preservative finish is professionally spray applied in the factory to three sides of the wood. The product is treated in your choice of color (one color for all product).

STAIN | PAINT

Which type of paint should I Use?

Properly painting and impregnating is one of the most important things to consider when thinking about how to extend your product's lifetime.

Paint and natural wood finish instantly spruce up the aesthetics of your product.

The decision you will need to make is if you want to use a water-based wood stain or paint. Both will offer you UV protection. The wood stains will allow the texture of the wood to show through and many are now available in a vast range of colors, however, paints will give you an intensive color, but will cover the grain and texture of the wood.

USAGE AND MAINTENANCE

Things to note when using the product:

- Products that are used for staying overnight should be equipped with a smoke alarm and an extinguisher;
- The product owner is responsible for the security and should work out a rescue plan for the camping site;
- Remember that using heating appliances or temporary camping stoves isn't just a fire risk, but a risk of carbon monoxide poisoning as well.

MAINTENANCE. You should not forget that wood is a natural material, it changes move depending on weather conditions. Large and small cracks, color tone differences and changes, as well as a changing structure of wood are not errors, but a result of wood growing and a feature of wood as a natural material. Natural wood (not impregnated) becomes greyish after having been left untouched for a while and can be turned blue and become mouldy. You should immediately process them with wood impregnations to protect the wooden details of our produced products.

- Like any our product, our produced furniture's needs to be looked after and processed with a wood impregnation agent or painted if you want it to last for years. Regular cleaning of your furniture is necessary to prevent mould. General warm soapy water is enough if done regularly;
- If necessary, outside doors must be adjusted by the customer;
- If you do not use your Product often we highly recommend to use the installation of our vent to stop condensation;
- If you find a sap pocket open during the life of your Product - you can allow it to dry naturally and then cut the sap off with a blade.



Misko 25, LT-85302 Venta, Lithuania
info@vikingindustrier.com